



Brigade

How to enable or disable audio recording on the cameras on MDR-600 Series

Version 1.0 – Aaron Scott

Overview

This guide is designed to explain:

- How to enable or disable audio recording for each individual camera channel on an MDR-600 Series, for both Main-Stream and Sub-Stream recordings.
- How to save your changes.




Audio Recording Options

Users can enable or disable the audio recording from each camera channel individually. This setting depends on the utilised cameras having microphones.

There are 3 options:

- **Always Audio** (Main-Stream or Sub-Stream recordings can have audio, whether alarm recording has it or not, depending on alarm recording setting).
- **No Audio** (Main-Stream or Sub-Stream recording has no audio).
- **Alarm Audio** (only Main-Stream or Sub-Stream alarm recording can have audio, whether alarm recording has it or not, again depending on alarm recording setting).

How to Log In to the MDR Setup Menu

- To log in to your MDR, insert your wired USB mouse into the USB port on the front of the MDR.
- Using your mouse, right-click anywhere on the monitor's display; a menu bar will appear along the bottom of the screen.
- Click the person icon  in the bottom right of the screen to open the login page.





How to Log In to the MDR Setup Menu

- Log in as administrator
- Enter your password
- Select your preferred language


Note: If you have forgotten your password, contact Technical Support.

- Click on  to open Setup.

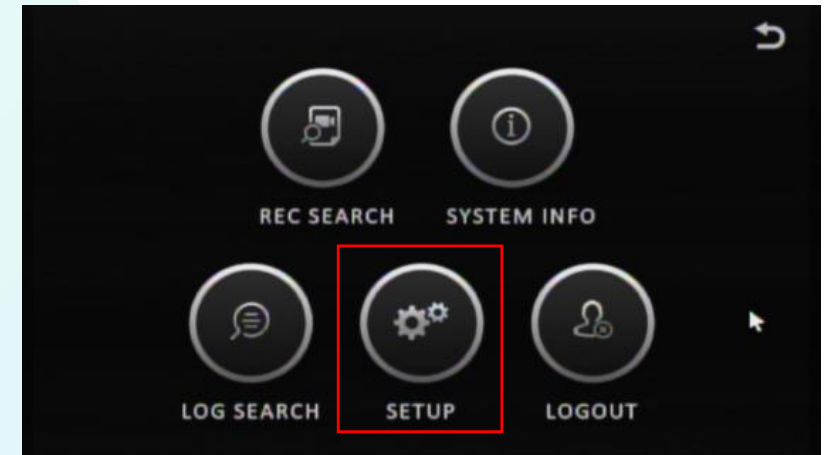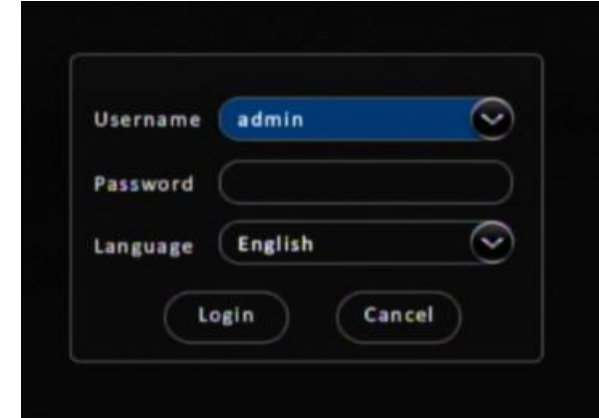

Enable or disable audio recording (Main-Stream)

- Click on (Surveillance – Record – HDD)
- Click on the drop-down box next to Channel
- Select the Camera Channel you wish to enable or disable.
- Then click on the scroll-down arrow  to scroll the tab down to (Audio)

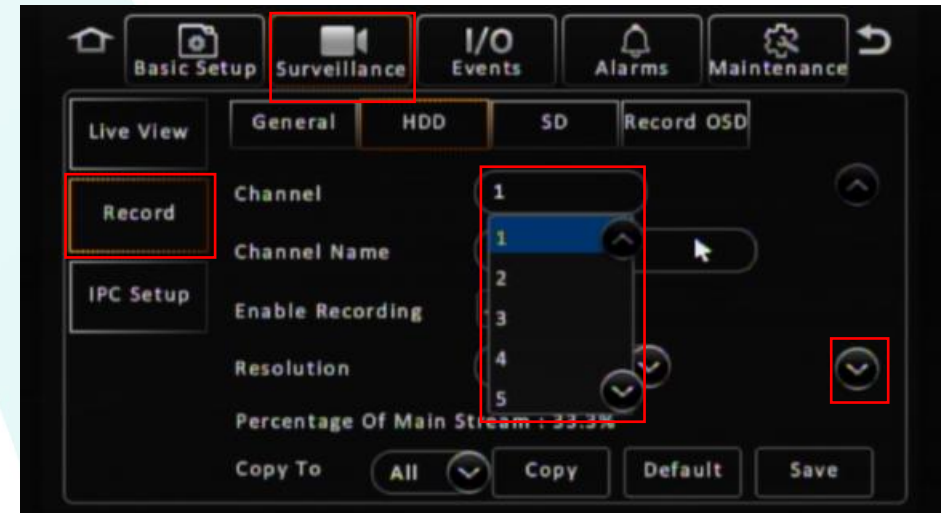

Enable or disable audio recording (Main-Stream)

From the drop-down box next to **Audio**, you can select one of three options depending on your requirements.

- Always Audio
- No Audio
- Alarm Audio



Enable or disable audio recording (Sub-Stream)

- Click on (Surveillance – Record – SD)
- Click on the drop-down box next to Channel
- Select the Camera Channel you wish to enable or disable.
- Then click on the drop-down arrow  next to (Audio) and select the required option.



Saving changes

Once the appropriate settings have been changed, it is very important to click **Save** before exiting the setup menu.

Note: If you exit the setup menu without clicking Save first, no settings will change and the camera may continue to record audio.



Contact Us

Brigade Electronics Group Plc.
Brigade House, The Mills, Station Road
South Darenth, Kent DA4 9BD, United Kingdom
Sales and Customer Services: +44 (0) 1322 420300
Technical Support: +44 (0) 1322 420347
www.brigade-electronics.com